


FLAMEPROOF/WEATHERPROOF PANEL

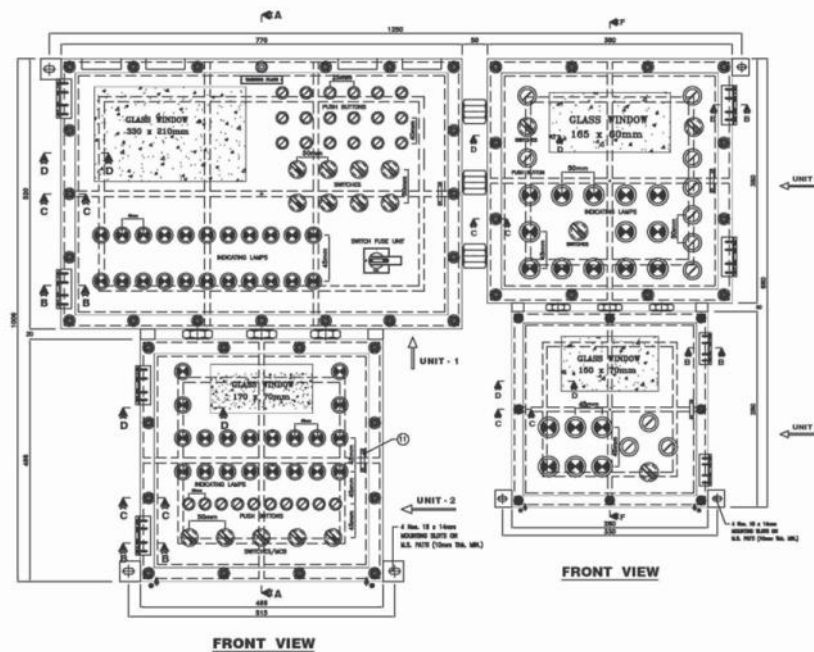

SIZE :

770(H)mmx520(W)mmx175(D)/240(D)/x300(D)/345(D)mm
 480(H)mmx480(W)mmx175(D)/240(D)/300(D)/345(D)mm
 380(H)mmx380(W)mmx175(D)/240(D)/300(D)/345(D)mm
 280(H)mmx280(W)mmx175(D)/240(D)/300(D)/345(D)mm

APPLICATION :

- 1) Junction Box
- 2) Power control center
- 3) Motor control center
- 4) Star/delta & DOL Starter
- 5) Variable Frequency Drive Panel
- 6) PLC Panel
- 7) Instrument Control Panel
- 8) PC Panel
- 9) Vacuum control panel





TECHNICAL SPECIFICATION :

IP	IP66 (IS/IEC 60529:2001)
CASTING	AL-LM6/STAINLESS STEEL (ALL GRADE)
TEMPERATURE	T6 (IS/IEC 60079:2007)
PAINT	EPOXY POLYESTER
GAS GROUP	IIA / IIB / IIC
'O' RING	NEOPRENE
USES	Junction Box / Power Control Center / Star Delta & DOL Starter / PLC Panel / VFD Panel / Instrument Control Panel



SURAKSHA-4



SURAKSHA-1



SURAKSHA-2



SURAKSHA-3



SHREE ELECTRICAL & ENGINEERING COMPANY

Corporate Office : B-54, 4th Floor, High Street, Corporate Park, Kapurbawd, Thane (W) 400 607
 Branch Office : 105, Anandhara Commercial Complex, Char Rasta Eastern Express Highway, Vapi.
 Factory : Plot C, B/h Stephens Church, Nr. R. Ma, GB Road, Manpada, Thane (W) 400 607
 ☎ 8888 399 333 / 022 - 41312345 E: sales@shreeelectrical.in / sales@shreeflameproof.com